


→ AS 52

window and door systems for exteriors

Developed with downsizing in mind, the AS 52 provides all the required parameters and maintains fully optimised construction. Thermally insulated, the AS 52 is suitable for creating both light and durable aluminium constructions which are extremely useful on the exterior.

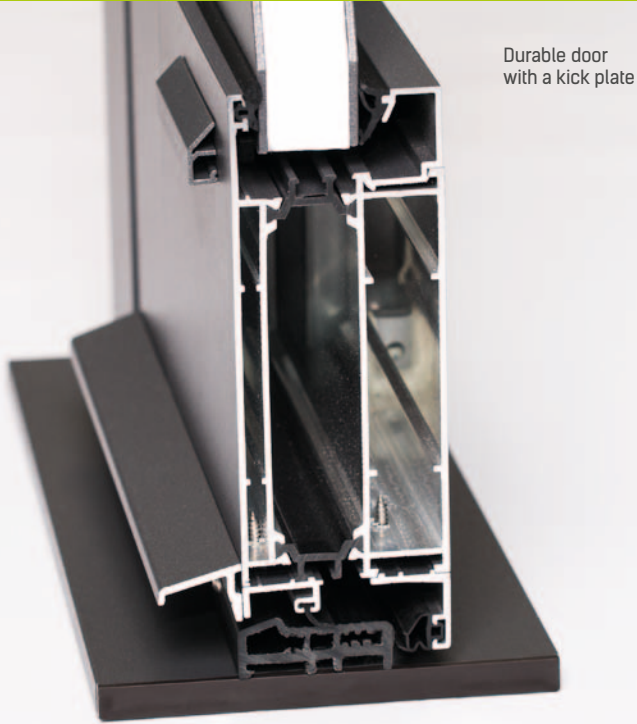


WINDOWS, DOORS, DISPLAY WINDOWS

- Door leaves faced with a frame
- Aluminium drainage caps
- Self-cleaning area near the glazing
- Notch or surface hinges in doors are optional
- Arc constructions, including welded ones


→ Selected features and system parameters

Width of window frame and door profile	52 mm
Range of glazed filling	up to 42.5 mm
Thermal insulation for doors	from 1.55 W/m ² K
Thermal insulation for windows	from 1.06 W/m ² K
Possible types of cladding	alu clad
	PCV


Window

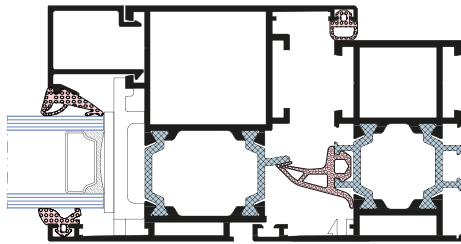


The possibility of using expansion tape as well as insulation flanges, systemically mounted

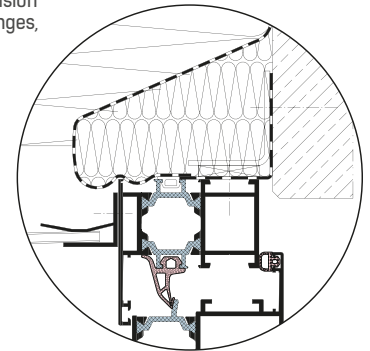


DOORS - THRESHOLD VERSIONS

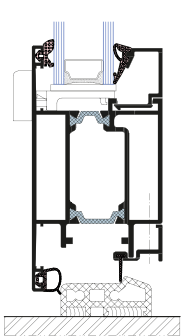


Plastic threshold

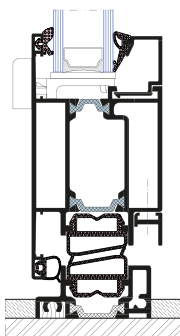

Aluminium threshold

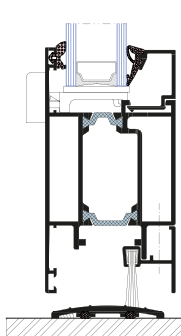

A brush with a threshold strip

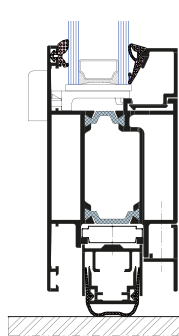

Collapsing threshold strip



WINDOW