

→ AS 75P


panel door system

The AS 75P system is a system of panel door constructions made with triple-chamber profiles, having excellent insulation and technical parameters. System is designed for prefabricated, thermally insulated doors with a panel mounted on the entire surface of the sash. It ideally matches smart homes, modern and classic buildings. Door panels in AS 75P system are intended for individual installation and window display. Solid built, durability of aluminium and plenty of design choices ensures long-term durability and aesthetics.




PANEL DOORS IN AS 75P SYSTEM:


- Meeting thermal parameter standards till 2021
- Aesthetics, durability and functionality of aluminium
- Capability of individual panel designs – milling shapes and holes
- Three versions of the panel: opaque, with translucent elements and fully glazed
- Single or double-side flush finish
- Multipoint locks
- Adjustable threshold seal
- Profiles made using ANTI-BI-METAL technology
- Central gasket in doors
- Door frame and sash depth: 75mm
- Hidden or roller hinges, surface
- Wide range of colours
- Single or double sash door with top or side lighting
- Inward or outward opened doors




Embedding for filling




Glazing mounting

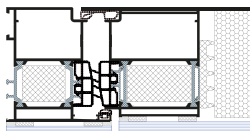


Enamelled glazing variant




Panel variation

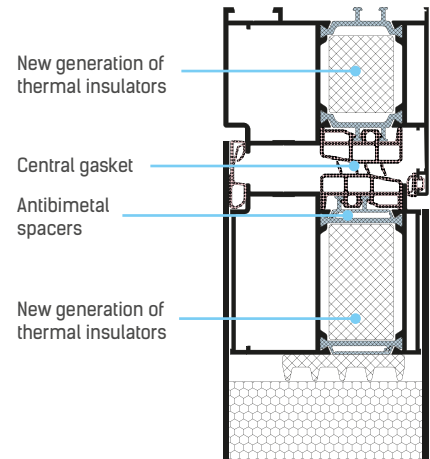


DOOR – THRESHOLD VERSIONS

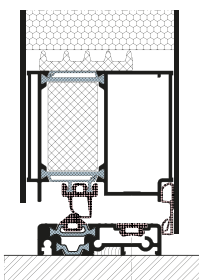


Aluminium threshold

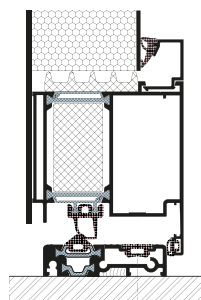

Aluminium threshold

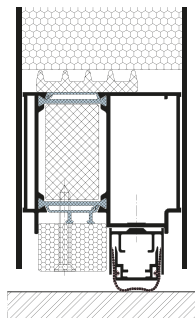

Sloping threshold

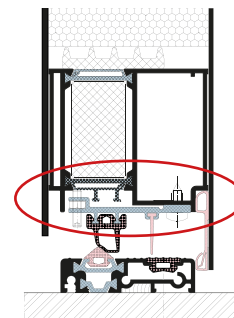

Threshold with adjustable sealing

NEW